

# Lock-up Valve YT-400 / YT-405 / YT-430


Product Number: YT-400 / YT-405 / YT-430       (specify your requirement)

Model	Acting Type	Connection Type *	Ambient Temp
YT-400	<span style="background-color: yellow; border: 1px solid black; padding: 0 2px;">S</span> Single	<span style="border: 1px solid black; padding: 0 2px;">P</span> PT	<span style="background-color: lightblue; border: 1px solid black; padding: 0 2px;">1</span> -20~70°C
YT-405	<span style="background-color: yellow; border: 1px solid black; padding: 0 2px;">D</span> Double	<span style="border: 1px solid black; padding: 0 2px;">N</span> NPT	<span style="background-color: lightblue; border: 1px solid black; padding: 0 2px;">2</span> -20~120°C
YT-430			<span style="background-color: lightblue; border: 1px solid black; padding: 0 2px;">3</span> -40~70°C

\* YT-405, YT-430 is available for NPT connection type ONLY.



Item · Type	YT-400	YT-405	YT-430
Signal Pressure	0.14~0.7MPa(1.4~7 bar)		
Max Supply Pressure	Max. 1MPa (10bar)		
Lock-Up Pressure	Max. 0.7MPa (7bar)		
Differential Pressure	Below 0.01MPa (0.1bar)		
Ambient Temp.	-20°C~70°C(-4~158°F)		
Flow Capacity (Cv)	0.9		1.8
Air Connection	PT(NPT)1/4	NPT 1/4	NPT 3/8
Signal Connection	PT(NPT)1/4	NPT 1/4	NPT 1/4
Material	Aluminum Diecasting	Stainless Steel 316	Aluminum Diecasting
Weight	Single	0.45kg(1.0lb)	1.3kg(2.2lb)
	Double	0.7kg(1.5lb)	1.5kg(3.3lb)

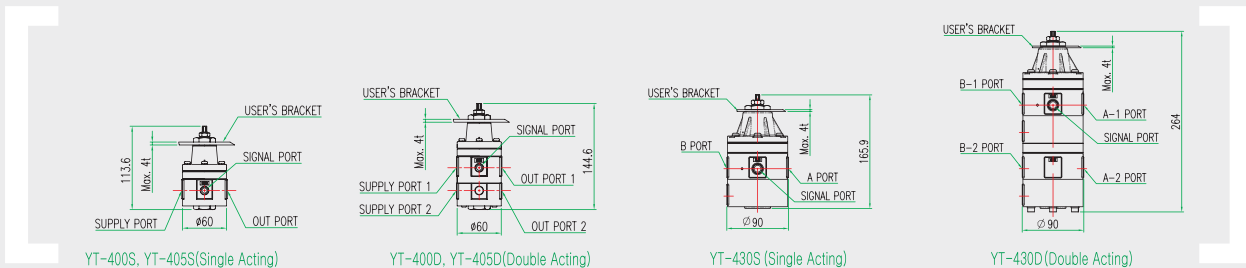

Lock-up valve YT-400 senses the main supply pressure and shuts down the air flow when the pressure is lower than setting.

- Compact size - NO bracket is required
- Detects small variation of the pressure - below 0.1 kgf/cm<sup>2</sup>.